

# PIR Sensor



## Product information

93118920 Tung PIR Sensor

## Features and benefits

- Independent module design
- Input Voltage: 220-240VAC 50/60Hz
- Max load wattage: 504W
- Vandal resistance level: IK08
- ON/OFF function
- Hold time: 10S/5Min/10Min/15Min/20Min
- Day light sensor: 15lux/30lux/50lux/disable
- Detecting height up to 8m
- Operating Temp: -20~50°C
- Loop in and loop out by 3x1.5mm cable
- Fitting color: grey

## Housing properties

- Housing: polycarbonate, grey
- Type of protection IP66

## Interfaces

- Terminal blocks: push terminals

## Installation Type

- Surface mounted
- Suspended (Suspension cable is required)

## Application areas



Residential/  
Commercial



Education



Healthcare



Retail




Industrial


## Wiring and connection

Input wire cross-section	1.5 mm <sup>2</sup>
Output wire cross-section	1.5 mm <sup>2</sup>
Maximum allowable current to the terminal	6 A

# Installation and wiring Instruction

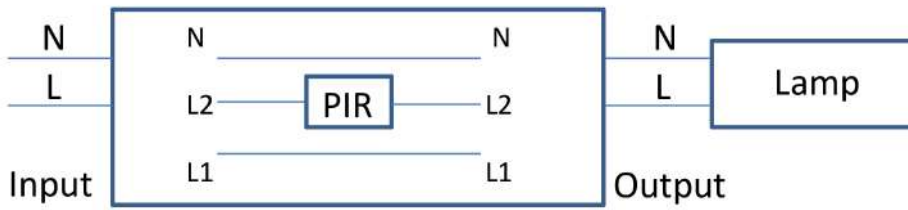

## Dimensions

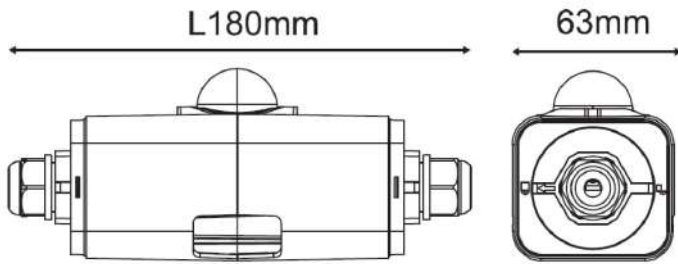


## Parameters Setting



10sec/5min/10min/15min/20min



15lux/30lux/50lux/disable



### STARTUP



H (m)	WØ (m)*
2 (min.)	5
3	7
4	11
5	13
6	13
7	14
8	14

\*±20% tolerance subject to environmental conditions

